

(9)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

(11) Publication number:

**0 316 048  
A2**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number: **88202503.4**

(51) Int. Cl.4: **G06M 7/00**

(22) Date of filing: **09.11.88**

(30) Priority: **12.11.87 GB 8726478**

(43) Date of publication of application:  
**17.05.89 Bulletin 89/20**

(84) Designated Contracting States:  
**AT BE CH DE ES FR GB GR IT LI NL SE**

(71) Applicant: **UNILEVER NV**  
**Burgemeester s'Jacobplein 1 P.O. Box 760**  
**NL-3000 DK Rotterdam(NL)**

(84) **BE CH DE ES FR GR IT LI NL SE AT**

(71) Applicant: **UNILEVER PLC**  
**Unilever House Blackfriars P.O. Box 68**  
**London EC4P 4BQ(GB)**


(84) **GB**

(72) Inventor: **Giles, Alan Frederick**  
**63 High Street Hail Weston**  
**St. Neots Cambs. PE19 4JW(GB)**

(74) Representative: **Keppels, Willem Richard**  
**Engelbertus Gerardus, Drs. et al**  
**Unilever N.V. Patent Division P.O.Box 137**  
**NL-3130 AC Vlaardingen(NL)**

(54) **Measuring apparatus.**

(57) Apparatus for detecting and counting flowable particulates having means for feeding these particulates at a uniform speed through a measuring area, defined by radiation emitting and sensing means which are arranged in a plane transverse to the feeding direction of the particulates and such that an even number of fan shaped, overlapping arrays of sensing beams can be generated between the emitting and sensing means, each pair of arrays having two lines of symmetry: the one connecting the convergence points of the fan shaped arrays and the other being the perpendicular bisector thereof.

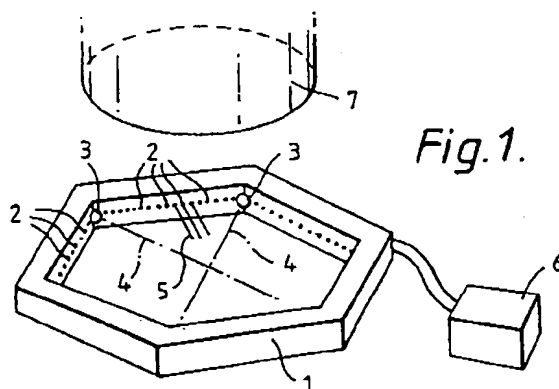

**Fig. 1.**

**EP 0 316 048 A2**

## Measuring apparatus

The invention relates to an apparatus for detecting and counting flowable particulates comprising means for feeding particulates at a substantially uniform speed through a measuring area, defined by radiation emitting and radiation sensing means being arranged in a plane transverse to the direction of travel of the particulates and connected to computing means.

Such apparatus is described in the European patent application no. 0.207.567 of the same inventor which is included here by reference thereto.

When using such an apparatus care has to be taken that the particles are caused to flow along a well defined path and that a rather fine grid of parallel radiation beams in at least two crossing directions is used.

The first requirement puts a restriction on the throughput of the apparatus, the latter requirement cannot be easily met because of the physical dimensions of the radiation emitting and particularly the sensing means.

The invention seeks to lessen or remove these disadvantages and restrictions and to that end the apparatus as described hereinbefore is characterized in that the radiation emitting and sensing means are arranged such that at least one pair of fan shaped, overlapping arrays of sensing beams can be generated, each pair of arrays having two lines of symmetry: the one connecting the convergence points of the fan shaped arrays, the other being the perpendicular bisector thereof. In order to improve the particle discrimination, the apparatus in a preferred embodiment, is provided with emitting and sensing means, which are arranged such that fan shaped arrays of beams in a rotation symmetrical arrangement can be generated. In a particularly preferred embodiment of the emitting and the sensing means the ones are arranged at the vertices of a regular polygon having an even number of angles and the others about along the sides of said polygon.

Most commercial radiation sensing means have a total sensitivity angle of about 60° and therefore a suitable arrangement at lowest expense can be obtained if the above mentioned polygon is a hexagon.

Generally speaking the sensing elements together with the amplifiers used in conjunction therewith require more space than the emitters and in that case it is preferred that each fan shaped array is delimited by one sensing element and a plurality of emitting elements.

Again for better particle discrimination and reliability of the results the arrangement of the sens-

ing elements and the emitting elements is such that the axis of maximum transmission of each emitting element coincides with a direction of relative low sensitivity of a corresponding sensing element while the axis of maximum sensitivity of said element coincides with a direction of relative low transmission of said emitting element.

Particularly preferred is an arrangement wherein the one kind of the emitting and the sensing means is arranged at the vertices of a polygon each with its main axis directed at the opposite vertex and the other kind of elements along the sides of the polygon each with its main axis at right angles to the respective side.

A more thorough understanding of the invention may be obtained from the following description taken in connection with the accompanying schematic drawings, in which:

Fig. 1 is a schematic drawing in perspective view of an apparatus of the invention.

Fig. 2 is a simplified diagram of the arrays of radiation used in the apparatus of Fig. 1.

Figs 3 and 4 are alternative embodiments shown in the same manner as in Fig. 2.

Figs 1 and 2 illustrate a preferred embodiment of the present invention in which in a regular hexagonal support 1 radiation emitters 2 and sensors 3 are arranged, the sensors 3 at the vertices each with its axis of maximum sensitivity 4 directed at the opposite vertex and the emitters arranged along the sides of the hexagonal support, each with its axis of maximum emission 5 at right angles to said side. Both the sensors and the emitters are connected to a computing means 6 for controlling the working thereof and for computing the information obtained from the sensors. Feeding means 7 for feeding particulate material through the center of the hexagonal support 1 are arranged over said support.

Fig. 3 schematically illustrates the most simple embodiment of the invention: two sensors 3 are arranged opposite each other with their axes of maximum sensitivity 4 coinciding. Next to each sensor 3 along lines 8 extending at right angles to said axes 4 a plurality of radiation emitters 2 are arranged, such that their axes of maximum emission are parallel to the axes 4.

This arrangement of sensors and emitters is defining two arrays of fan shaped sensing beams 9 which arrays are symmetrical with respect to the line 4 extending between the sensors 3, being at the convergence points of the arrays, and with respect to the line 10, which is the perpendicular bisector of said line 4.

In Fig. 4 an alternative embodiment is being shown in a square arrangement, the sensors 3 being arranged at the corners of a square and the emitters 2 along the sides.

5

#### Claims

1. Apparatus for detecting and counting flowable particulates comprising means for feeding particulates at a substantially uniform speed through a measuring area, defined by radiation emitting and radiation sensing means being arranged in a plane transverse to the direction of travel of the particulates and connected to computing means, characterized in that the radiation emitting and sensing means are arranged such that at least one pair of fan shaped, overlapping arrays of sensing beams can be generated, each pair of arrays having two lines of symmetry: the one connecting the convergence points of the fan shaped arrays, the other being the perpendicular bisector thereof.

10

15

20

2. Apparatus according to claim 1, characterized in that the emitting and sensing means are arranged such that fan shaped arrays of beams in a rotation symmetrical arrangement can be generated.

25

3. Apparatus according to claim 2, characterized in that of the emitting and the sensing means the ones are arranged at the vertices of a regular polygon having an even number of angles and the others about along the sides of said polygon.

30

4. Apparatus according to claim 3, characterized in that the polygon is a hexagon.

5. Apparatus according to claims 1 to 4, characterized in that each fan shaped array is delimited by one sensing element and a plurality of emitting elements.

35

6. Apparatus according to any of claims 1 to 5, characterized in that the axis of maximum transmission of each emitting element coincides with a direction of relative low sensitivity of a corresponding sensing element while the axis of maximum sensitivity of said element coincides with a direction of relative low transmission of said emitting element.





40

45

7. Apparatus according to any of claims 3 to 6, characterized in that the one kind of the emitting and the sensing means is arranged at the vertices of a polygon each with its main axis directed at the opposite vertex and the other kind of elements along the sides of the polygon each with its main axis at right angles to the respective side.

50

55

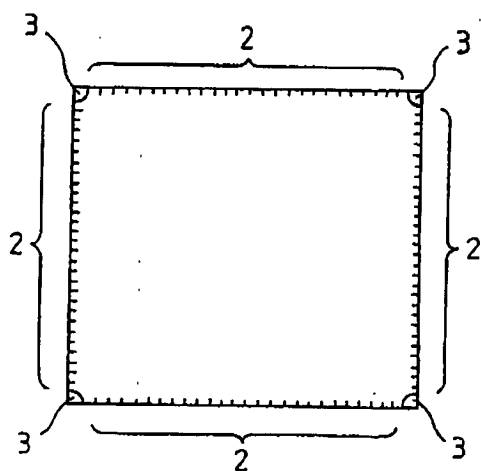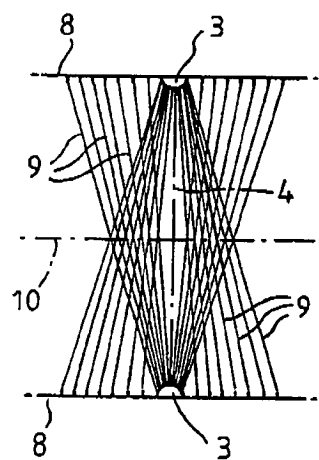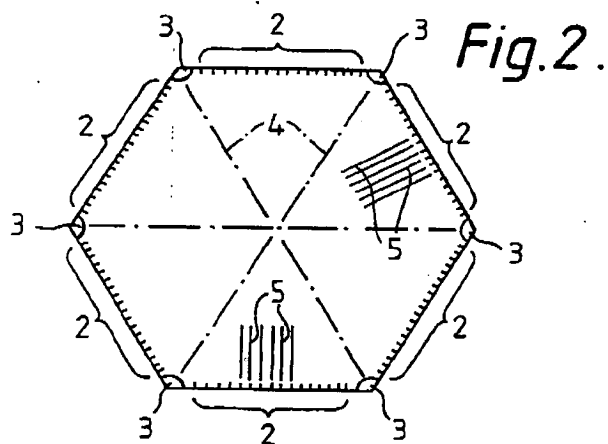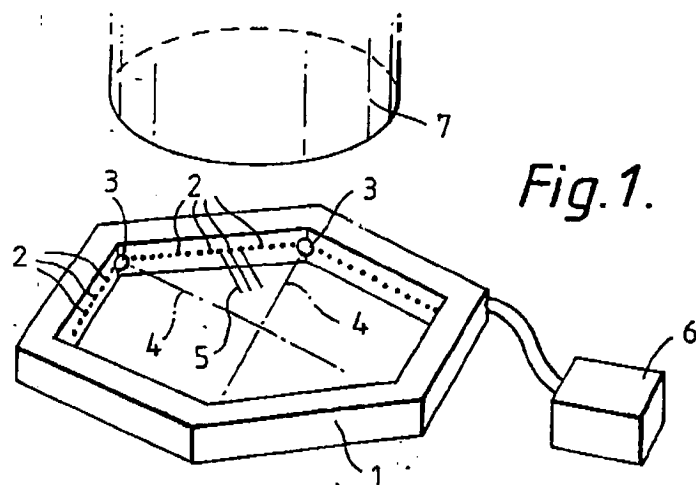



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number:

**0 316 048 A3**

12

## EUROPEAN PATENT APPLICATION

21 Application number: 88202503.4

51 Int. Cl.<sup>5</sup>: G06M 7/00

22 Date of filing: 09.11.88

30 Priority: 12.11.87 GB 8726478

43 Date of publication of application:  
17.05.89 Bulletin 89/20

84 Designated Contracting States:  
AT BE CH DE ES FR GB GR IT LI NL SE

88 Date of deferred publication of the search report:  
13.02.91 Bulletin 91/07

71 Applicant: UNILEVER NV  
Burgemeester s'Jacobplein 1 P.O. Box 760  
NL-3000 DK Rotterdam(NL)

84 BE

Applicant: UNILEVER PLC  
Unilever House Blackfriars P.O. Box 68  
London EC4P 4BQ(GB)

84 GB


72 Inventor: Giles, Alan Frederick  
63 High Street Hail Weston  
St. Neots Cambs. PE19 4JW(GB)

74 Representative: Keppels, Willem Richard  
Engelbertus Gerardus, Drs. et al  
Unilever N.V. Patent Division P.O.Box 137  
NL-3130 AC Vlaardingen(NL)

54 Measuring apparatus.

57 Apparatus for detecting and counting flowable particulates having means for feeding these particulates at a uniform speed through a measuring area, defined by radiation emitting and sensing means which are arranged in a plane transverse to the feeding direction of the particulates and such

that an even number of fan shaped, overlapping arrays of sensing beams can be generated between the emitting and sensing means, each pair of arrays having two lines of symmetry: the one connecting the convergence points of the fan shaped arrays and the other being the perpendicular bisector thereof.

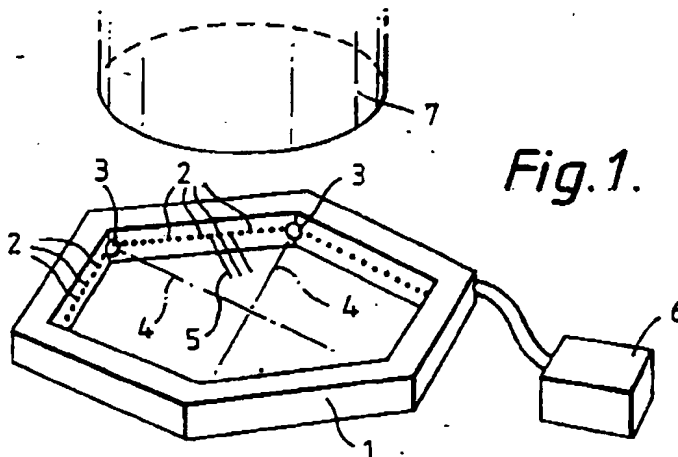

*Fig. 1.*

EP 0 316 048 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application number

EP 88202503.4

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
D, Y	<u>EP - A1 - 0 207 567</u> (UNILEVER) * Abstract; claims 1,5; fig. 1,3 *	1	G 06 M 7/00
Y	<u>EP - A1 - 0 216 526</u> (NATIONAL RESEARCH) * Abstract; fig. 3; page 5, line 30 - page 6, line 21 *	1	
A	<u>US - A - 4 675 520</u> (HARRSEN) * Abstract; fig. 1,4 *	1	
A	<u>US - A - 4 252 250</u> (TOTH) * Abstract; fig. 5.6 *	1	
A	<u>US - A - 3 876 877</u> (MEULENSTEEN) * Abstract; fig. 1 *	1	
A	<u>US - A - 3 851 169</u> (FAXVOG) * Abstract; fig. *	1	
A	SOVIET INVENTIONS ILLUSTRATED, EL section, week D 30, September 2, 1981 DERWENT PUBLICATIONS LTD., London, X 25 * SU-767 796 (AGRIC MECHANIS) *	1	
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 03-12-1990	Examiner NEGWER
<b>CATEGORY OF CITED DOCUMENTS</b>			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EP Form 1503 03 92